


imant's RotoKnife™

Benefits of Koro RotoKnife

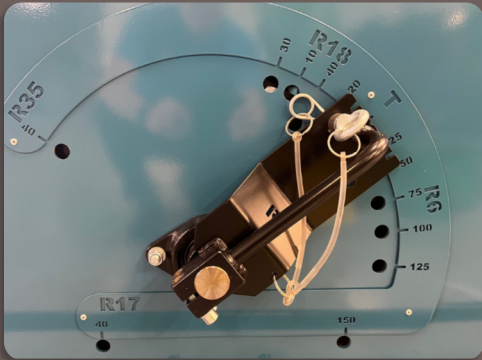

Quick, in-the-field, no tools required adjustment and setting of Roto Knife Operation.

Multiple number of discs in the ground and depth settings to address agronomic needs from cutting stolons and rhizomes, upper soil profile aeration, venting, or deep 6" linear aeration for enhanced gas exchange and drainage.



Optional spike shafts enable a quick and effortless way to vent your turf surface, pre-treat to maximize soil sprays & wetting agent applications, and incorporate fairway topdressing applications (when applied at the 7-10-ton rate).


imants

RotoKnife™

The Imants RotoKnife is a versatile and effective linear disc-aerator designed to relieve surface compaction, improve aeration, reduce thatch buildup, and remove surface water. The RotoKnife is fast across surfaces and serves as a versatile root zone management tool. Rotor shafts can be set in five different positions, offering flexibility in working depth and linear spacing. Disc shafts allow for variable-depth slitting, ranging from 1" to a maximum depth of 6" at 12" spacing, or as shallow as 3/8" to 1 1/2" deep at 4" spacing. Spiker shafts are used prior to soil sprays to achieve deeper infiltration into the soil profile. When used after topdressing fairways and tees, spiker shafts help work sand into the canopy. One spiker shaft allows for variable-depth spiking from 3/8" to 1 1/2" deep at 4" spacing. Two spiker shafts can be used in tandem at a depth of 1 1/2" at 2" spacing. The RotoKnife can also be used as a roller to remove surface irregularities.

HIGHLIGHTS

- Minimal surface disruption
- Increases soil's ability to move water
- Increases aeration
- Excellent for managing thatch and black layer

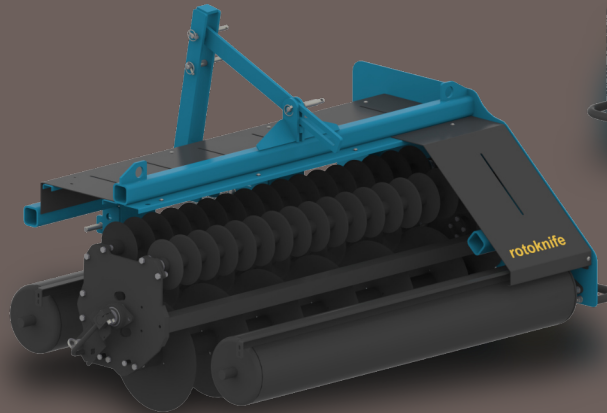

Visit AQUAAIDSOLUTIONS.com for additional RotoKnife pictures and videos.

Specifications

	RotoKnife
Working Width	71"
Transport Width	89"
Weight (approx)	1,774 lb
Working Depth	3/8" - 6"
Disc Diameter	8" slit and spiker discs , 18" slit discs
Disc Spacing	2" , 4" , 12"
Disc Thickness	3/16" slit and spiker discs
Number of Discs	35 spiker , 17 x 8" , 6 x 18"
Power Requirement	45 - 60 hp

Tractor Requirement: 4-wheel drive recommended. Confirm individual tractor specification has adequate lifting capacity.
Operating Speed: Up to 6.2 mph